



PERSONAL  
COMPUTERS

PLEASE CONTACT :

**PT BAUMA UPS**

16th Floor, Wisma Metropolitan II,  
Kav. 29-31, Jl Jenderal Sudirman, Jakarta 12920, Indonesia

Phone : (62-21) 5711850 • Fax : (62-21) 5711861

Website : [www.bauma.com/baumaups](http://www.bauma.com/baumaups)

E-mail : [bups.sales@bauma.co.id](mailto:bups.sales@bauma.co.id)

# BPD Series

350-550 VA  
single-phase

BPD Series 350-550 VA



The **BPD** series range is the ideal solution for small office and home systems (SOHO) requiring over voltage and mains failure protection. The compactness, versatility (a push-button switch with LED-based mimic panel and user-replaceable batteries) and functionality of the **BPD** allow it to easily fit into any small office and home environment. When the mains fails, connected loads are powered with a pseudo sine wave supply from the inverter.

**LOAD CONFIGURATOR**

Load type	Power (VA)*
Personal computer	250
LCD Monitor	70
15" Monitor	150
Scanner, printer	200
Modem, TV, DVD reader, PlayStation, Hi-Fi, Phone, Fax	50
Laser printer**	200

\*Average estimated value. \*\*Use the BPD filtered power output.

**CHARACTERISTICS**


- Maximum compactness
- 3 sockets with mains fail protection
- 1 socket with filtering for powering loads such as laser printers
- Integrated protection for telephone line/modem
- Cold start capability: the UPS can power up without a mains supply present
- User replaceable batteries
- USB interface
- Can be placed on a desktop, floor, or be wall-mounted
- Input supply and telephone cable included
- Short-circuit protection
- Auto restart (on mains return, after batteries have discharged)
- GS/TÜV (under the original private label manufacturer's name)
- Available with French (2P+T), UK or Schuko socket

**ADVANCED COMMUNICATION**


- UPSCom1 monitoring and shut-down software for Windows 2008, Vista, 2003, XP; Linux, Mac OS X and Sun Solaris
- Plug and Play function

**1 YEAR WARRANTY**

MODELS	BPD 400	BPD 600
POWER	350VA/225W	550VA/335W
<b>INPUT</b>		
Rated voltage	230 Vac	
Voltage range	188-262 Vac	
Frequency	50/60 Hz	
<b>OUTPUT</b>		
Voltage on mains operation	230 Vac	
Frequency on battery operation	50 or 60 Hz	
Waveform from battery/inverter	Pseudo sinewave	
<b>BATTERIES</b>		
Type	VRLA AGM Maintenance-free lead-acid	
Recharge time	6-8 h	
<b>ENVIRONMENTAL</b>		
Weight (kg)	3	3.1
Dimensions (HxWxD) (mm)	88 x 120 x 320	
Tel. protection	RJ11/45 connectors	
Communication	USB interface	
Compliance	EN 62040-1-1 and Directive 2006/95/EC; EN 62040-3 EN 62040-2 and Directive 2004/108 EC	
Marks	CE; GS/TÜV (under the original private label manufacturer's name)	
Operating temperature	0°C ÷ +40°C	
Colour	Graphite grey	
Altitude and relative humidity	6000 meters max. elevation, < 95% non condensing	
Accessories provided	1 input supply cable, telephone cable	

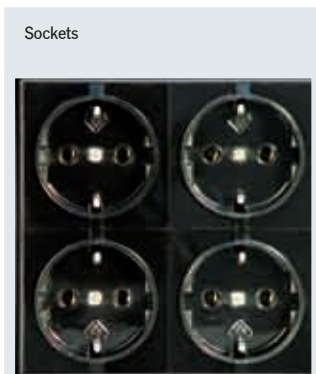

**BPD 400 - BPD 600**

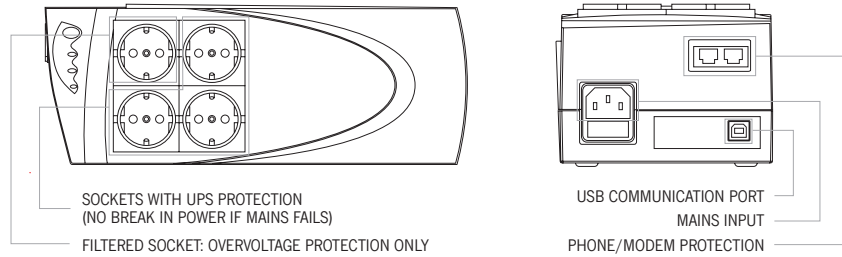

**TECHNICAL DETAILS**

